

MPEG-4 (Wireless) Internet Camera

Quick Installation Guide

Rev. 01 (February, 2005)

Made in Taiwan



Before You Begin...

System Requirement:

- 10 Base-T Ethernet or 100 Base-TX Fast Ethernet
- CD-ROM drive
- CPU: Intel Celeron 1.1GHz or above
- Memory: 128MB or above
- VGA resolution: 800x600 or above

Package Contents:


- One MPEG-4 Internet Camera
- One External Antenna (for wireless model)
- One Power Adapter
- One RJ-45 Ethernet Cable
- One Camera Stand
- This ***Quick Installation Guide***
- One Installation CD-ROM

Note: *If any item contained is damaged or missing, please contact your local dealer immediately.*

② Hardware Installation


Attaching the Camera Stand

The MPEG4 Internet Camera comes with a camera stand, which has a swivel ball screw head that can be attached to the camera's screw hole on the top/bottom panel. Attach the camera stand to the camera and station it for your application.




Installing the Antenna

(for wireless model) Connect an Ethernet cable to the network cable connector located on the camera's rear panel, and then connect it to the network.




Connecting the Ethernet Cable

Connect an Ethernet cable to the network cable connector located on the camera's rear panel, and then connect it to the network.



Connecting the Power Supply

Connect the external power supply to the DC power input connector located on the camera's rear panel, and then connect it to your wall outlet. (**Tip:** You can confirm the power source is supplied from the Power LED on the camera.)




③ Running the Setup Wizard

The Setup Wizard is a convenient tool that will guide you through the installation of your camera easily and quickly. After connecting the camera to your computer, you can install the Setup Wizard and complete the configuration now.

1. Insert the Installation CD-ROM into your CD-ROM drive.


Click **Setup Wizard**.

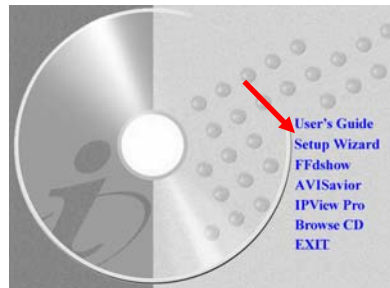


2. Click **Next**.



3. Click **Yes**.

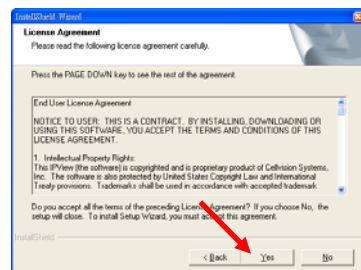


4. Click **Next**.

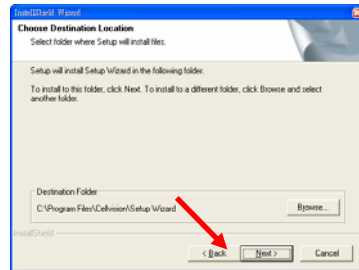

5. Click **Finish**.




To run the Setup Wizard,
click **Start -> Programs**
-> **Setup Wizard**.

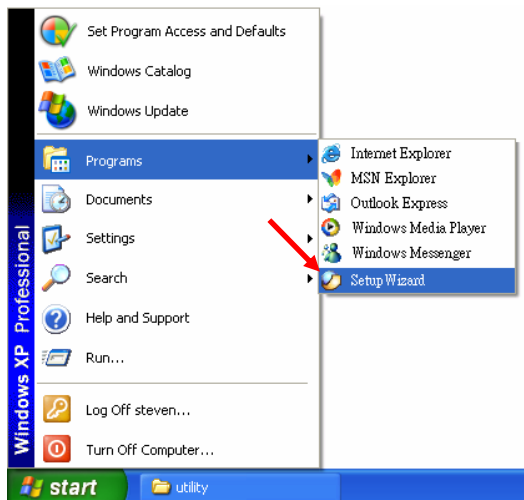

4

Using the Setup Wizard


When you launch the Setup Wizard, the main window will appear as shown, and the connected camera will be displayed in the list.

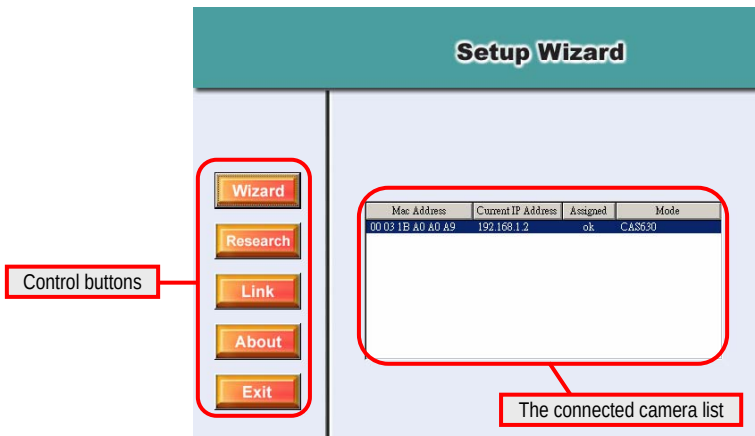

The components on the Setup Wizard:



Click **Wizard** to begin configuring the selected camera.



Click **Research** allows you to search the connected camera again.



Click **Link** to launch the web browser and view the images.



Click **About** to show the general information of the selected camera.



Click **Exit** to close the Setup Wizard.

Changing the Admin ID and Password

By default settings, the Admin ID and Password are **admin**. For security purpose, you are recommended to change the Admin ID and Password immediately.

Click **Wizard**. The dialog window appears as shown, asking you to enter the Admin ID and Password. If required, select the **Change** options and enter the new Admin ID and Password.

Enter **admin** in both boxes and then click **Next**.



The 'Setup Wizard' dialog box has a title bar and a main area. At the top, it says 'Enter the default ID and Password.' in a red box. Below that, it says 'Set up an Admin ID and Password to secure your camera. Click Next to continue.' There are two input fields: 'Admin ID:' and 'Password:'. Below each is a 'Change' checkbox and another input field. At the bottom right are 'Back', 'Next', and 'Exit' buttons. A red arrow points to the 'Next' button.

The settings of IP Address, Subnet Mask and Default Gateway must correspond with your camera and networking settings. Please check with your network administrator for correct settings.


Click **Next**.



The 'Setup Wizard' dialog box has a title bar and a main area. It says 'Set IP Address'. There are three input fields: 'IP Address', 'Subnet Mask', and 'Default Gateway'. At the bottom right are 'Back', 'Next', and 'Exit' buttons. A red arrow points to the 'Next' button.


This step is for wireless model only. If you want to use wireless function, select the Enable option. Then, you have to set up the related settings in the following fields of the screen, including **Connection Mode**, **Network Name (SSID)**, **Wireless Channel**, **Security Mode**, and **Authentication**.

If you enable the **Security Mode**, you have to set up the configuration in the following window.

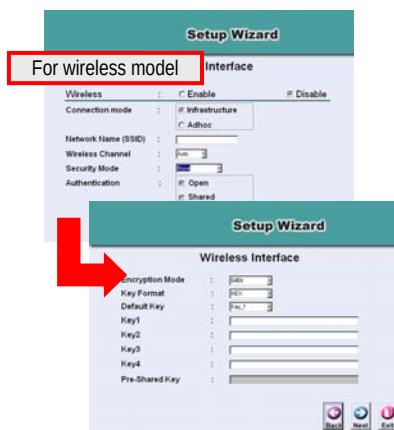

The 'Setup Wizard' dialog box has a title bar and a main area. It says 'Interface'. There are three tabs: 'Wireless', 'Interface', and 'Disable'. The 'Wireless' tab is selected. It has several input fields: 'Connection mode', 'Network Name (SSID)', 'Wireless Channel', 'Security Mode', and 'Authentication'. A red arrow points to the 'Next' button. Below this is another 'Setup Wizard' dialog box titled 'Wireless Interface'. It has several input fields: 'Encryption Mode', 'Key Format', 'Default Key', 'Key1', 'Key2', 'Key3', 'Key4', and 'Pre-Shared Key'. At the bottom right are 'Back', 'Next', and 'Exit' buttons.

This window displays the settings you set up. For any change, click **Back** to modify your settings. Otherwise, click **Restart** to save and apply the settings.



Setup Wizard

Administrator: admin Wireless: Disable
 Password: SSID:
 IP Address: 192.168.1.2 Channel: AUTO
 Subnet: 255.255.255.0 WEP Key1:
 DHCP1: 198.96.1.1 WEP Key2:
 DHCP2: 0.0.0.0 WEP Key3:
 WEP Key4:
 Pre-Shared Key:

The Setup Wizard has completed. Click on **Back** to modify your settings. Click **Restart** to save your current settings and reboot the Wireless Internet Camera / Video Server.

Buttons: Back, Restart

The configuration is completed, and you will return to the main window. Click **Link** to launch the web browser and view the images.




Setup Wizard

Buttons: Wizard, Restart, Link, About, Exit

Table:

Mac Address	Camera IP Address	Channel	Mode
00:09:5B:00:00:00	192.168.1.2	1	WIFI

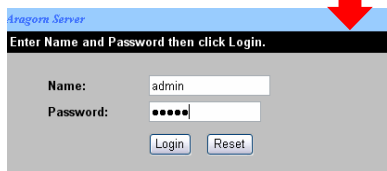


Aragorn Server

Enter Name and Password then click Login.

Name: admin
 Password: *****

Buttons: Login, Reset

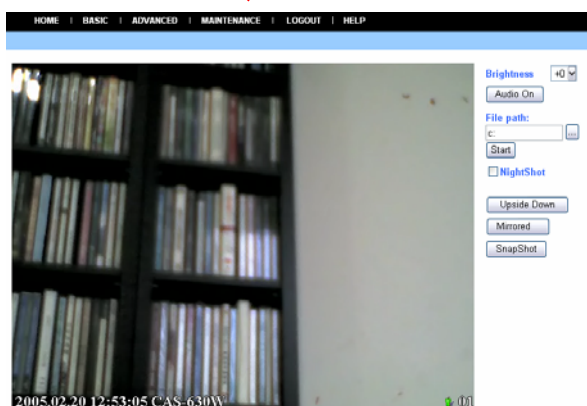

HOME | BASIC | ADVANCED | MAINTENANCE | LOGOUT | HELP

Brightness: +0

Audio On

File path: c: Start

NightShot

Upside Down

Mirrored

SnapShot

2005.02.20 12:53:05 CAS-630W

5 Tips

Software Information

Click About to show the general information of the selected camera.

Click **OK** to return to the main window.



Technical Support

For more information, please refer to the **User's Guide** located in the Installation CD.